



MODEL 2512 VERTICAL FLAT CASE TRANSPORT

THE PERFECT OFF-LINE SOLUTION FOR AUTOMATICALLY FEEDING CORRUGATED CASES WHEN USING NON-CONTACT INK JET SYSTEMS OR LABEL APPLICATORS.

SPECIFICATIONS:

CASE SIZES: Min- 12" long x 12" high
Max- 44" long x 36" high

(custom sizes available on review of application).

INPUT: Hopper fed-continuous

FINISH: Kiwi Blue

SHIPPING WEIGHT: 1400 lbs.

CARRIER: Air cylinder operated feed with bottom belt pinch drive.



HEIGHT OF DISCHARGE FROM FLOOR: 30" discharge height (optional heights available).

POWER REQUIREMENTS: Air- 60 PSI;
Electrical- 120V AC, 1PH, 60 Hz, 6 AMPS.

AIR CONSUMPTION: 4.2 SCFM at 40/m

AVAILABLE OPTIONS:

Model SC Auto Stacker Conveyor

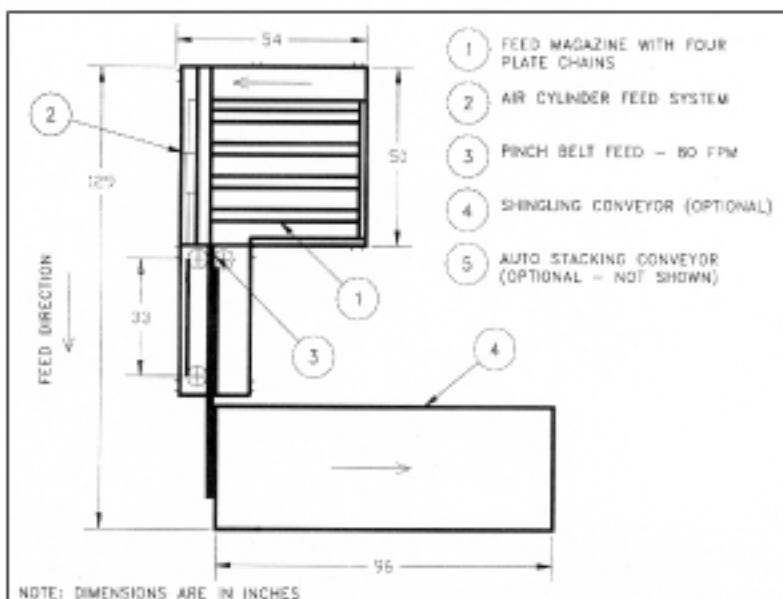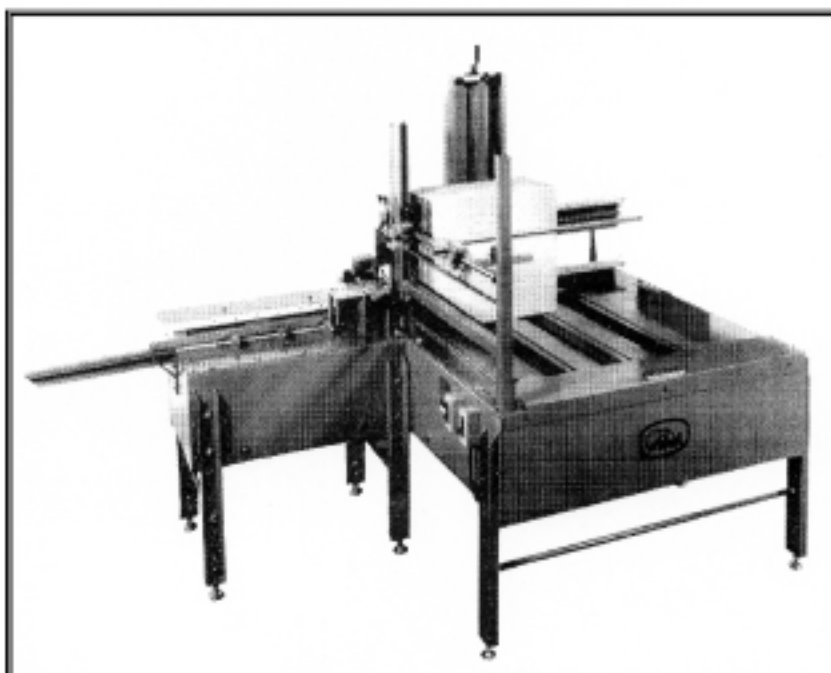

Output: shown in cases/minute.

Flat case length	Approx. output/cases per min
12" - 23"	40
24"	38
28"	33
32"	30
36"	27
40"	24
44"	22

*For larger sizes, please consult factory

Kiwi Coders Corporation, 265 E. Messner Dr. Wheeling, IL 60090 USA
847-541-4511 (phone) 847-541-6332 (fax)
e-mail: KIWICODERS@AOL.COM Internet: WWW.KIWICODERS.COM

